


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/13/03	SC

SKT1765
DOD41765

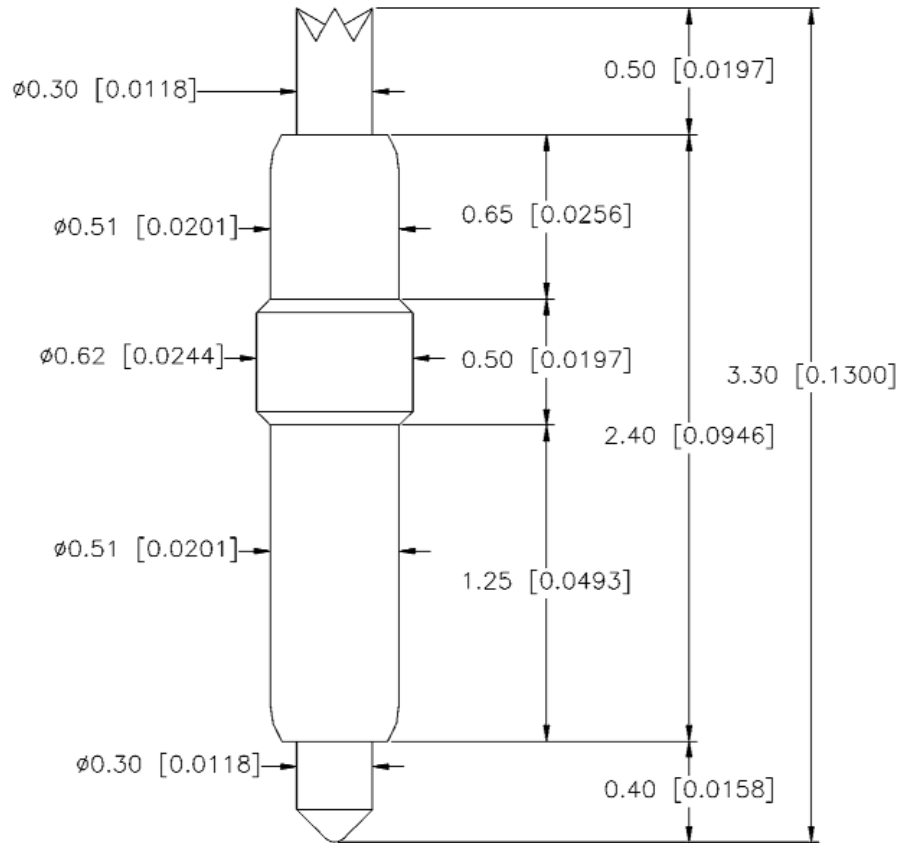

Unit: Millimeter[inch]

#### Spring Force

8.50g(0.300oz) at initial travel  
 16.00g(0.4564oz) at 0.45mm(0.0177) recommended travel  
 16.50g((0.656oz) at 0.60mm(0.0236) full travel

#### Material & Finish

Plunger      Hardened Beryllium copper      /Gold Plated  
 Barrel      Brass / Gold Plated  
 Spring      Music Wire      / Gold Plated

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



**Emulation Technology, Inc.**

VLSI and SMT ADAPTERS and ACCESSORIES


2344 Walsh Avenue, Bldg F  
 Santa Clara, CA 95051

TEL: (408) 982-0660  
 FAX: (408) 982-0664

SHEET: 1 OF 1	DATE: 6/13/03	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED: Joe Bagliere	DRAWN: SC	ITEM: POGO-PIN-3.30-1	
SCALED: N/A	DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-3.30-1, 0.80mm Pitch

REV	DESCRIPTION	DATE	INIT
A	NEW DRAWING	03-24-04	M.D.

SKT1765  
DOD 41765

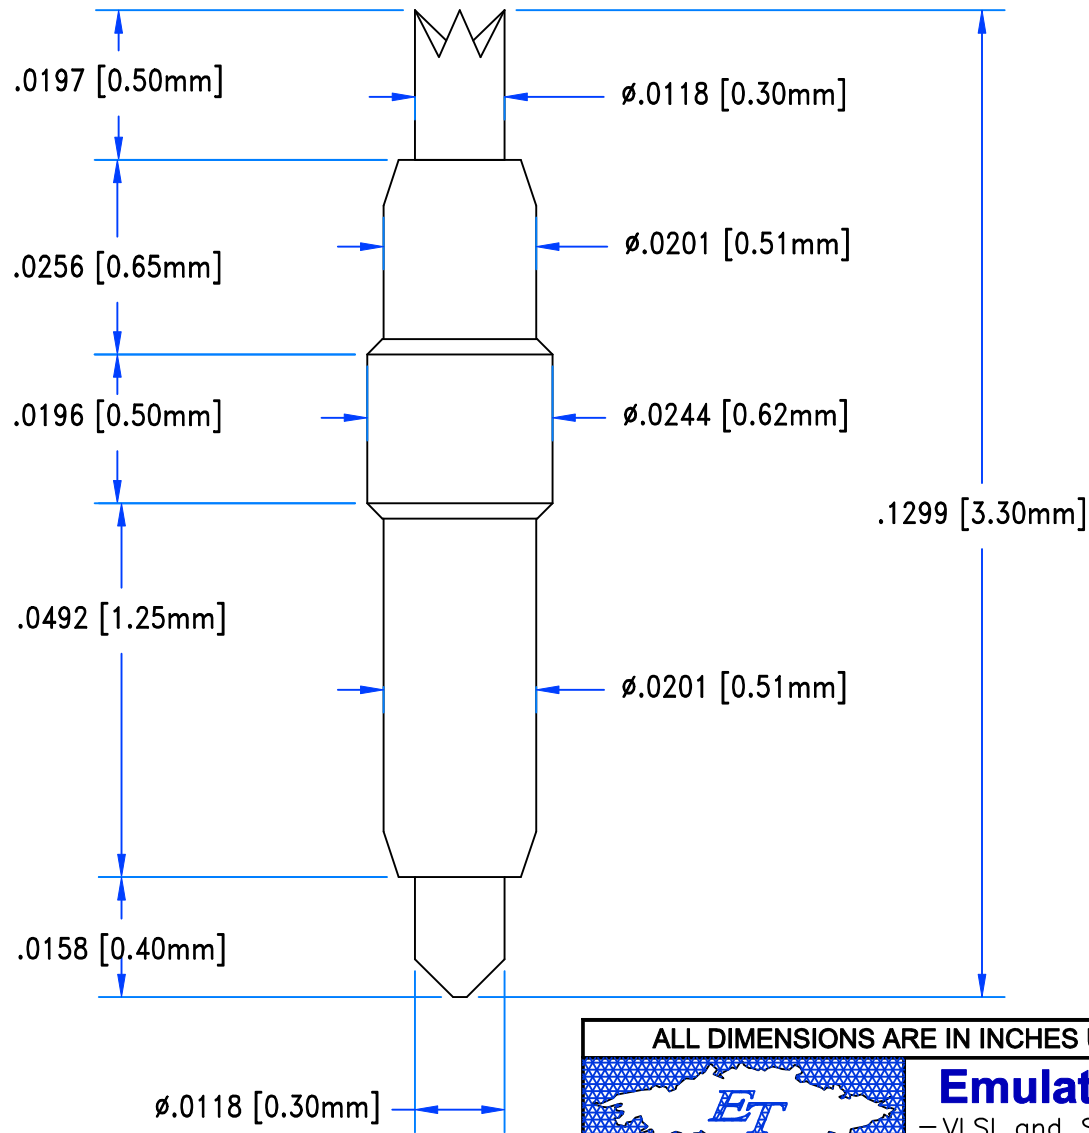

SCALE 40:1

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



**Emulation Technology, Inc.**

-VLSI and SMT ADAPTERS and ACCESSORIES-

[www.emulation.com](http://www.emulation.com)

TEL: (408) 982-0660

2344 Walsh Ave, Bldg. F Santa Clara, CA 95051

FAX: (408) 982-0664

SHEET:  
1 OF 1

DATE:  
03-24-04

REVISION:

**ASSEMBLY DRAWING**

CHECKED:  
PERRY MONROE

DRAWN:  
MIGUEL DELGADILLO

ITEM: POGO-PIN-3.30-1

DO NOT SCALE DRAWING

DESCRIPTION:  
POGO PIN ASSEMBLY