


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/29/05	H.N.
B	UPDATED DRAWING	01/28/14	JAG

SKT2338

[DEVICE SIDE]

[BOARD SIDE]

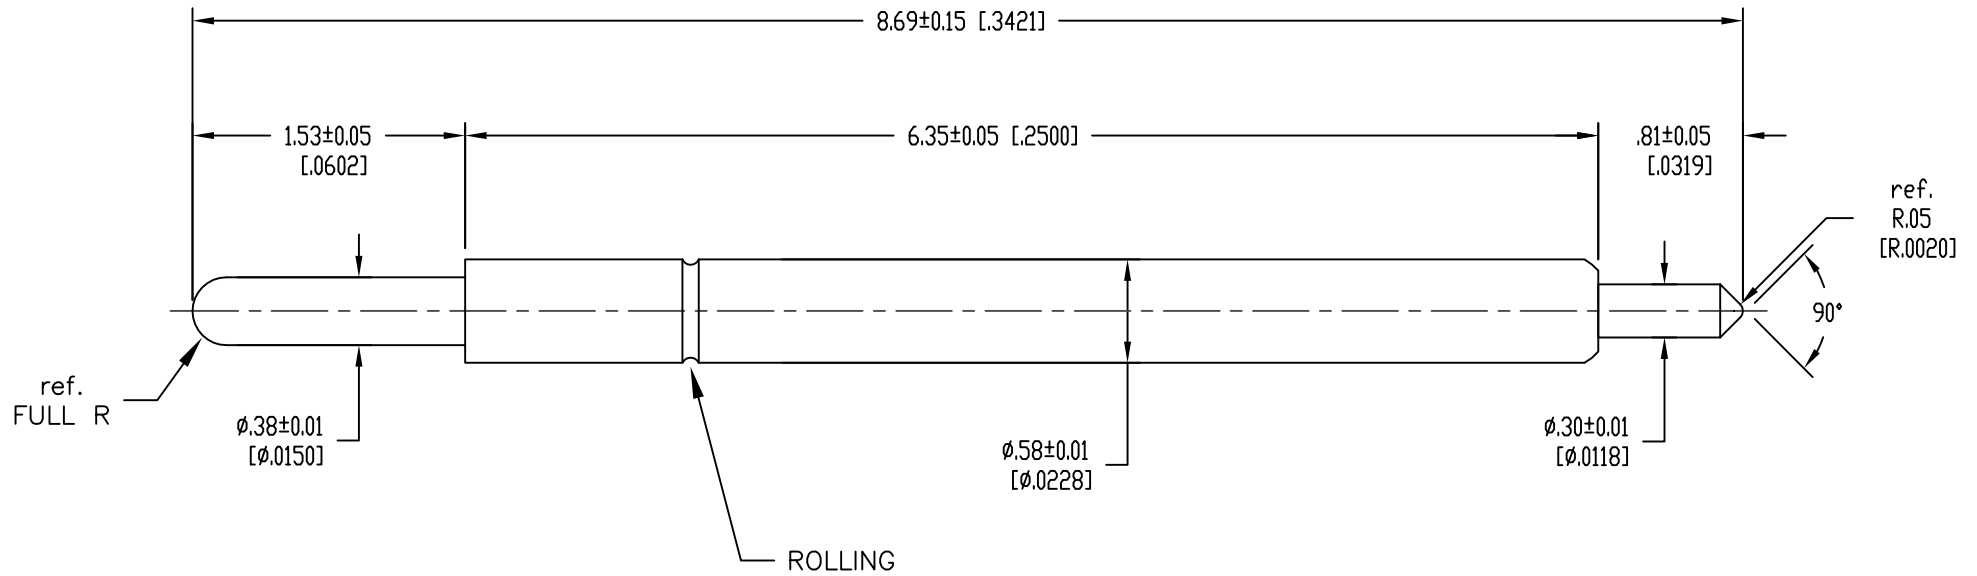

POINTING ACCURACY: ±0.050mm

SPRING FORCE [±20%]

- 12.5g (0.441oz) at INITIAL TRAVEL
- 31.3g (1.104oz) at 0.80mm (0.0315) RECOMMENDED TRAVEL
- 38.3g (1.351oz) at 1.10mm (0.0433) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER [DEVICE SIDE]	HARDENED STEEL	/GOLD PLATED
PLUNGER [BOARD SIDE]	HARDENED STEEL	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	STAINLESS STEEL	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD TEL: (805) 383-8480
 CAMARILLO, CA 93012 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 06/29/05	REVISION: B	ASSEMBLY DRAWING
CHECKED: PERRY MUNROE		DRAWN: HUY NGUYEN	
DO NOT SCALE DRAWING			ITEM: POGO-PIN-8.69-1
DESCRIPTION: POGO-PIN-8.69-1			