


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/09/06	H.N.
B	ADDED TOLERANCES	10/29/07	JAG
C	UPDATED DRAWING	07/11/14	JAG

SKT2543

TOP

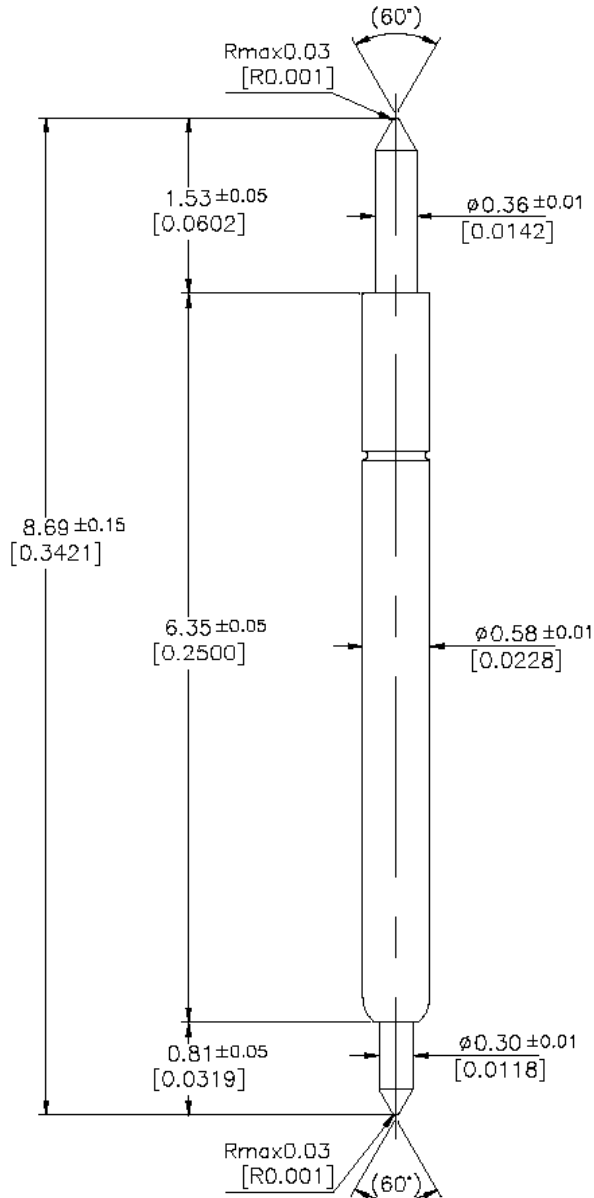

Pointing Accuracy:  $\pm 0.05$  mm

Spring Force:  $\pm 20\%$

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	12.5g (0.441oz)
Recommended Travel	0.8mm (0.0315)	31.3g (1.104oz)
Full Travel	1.1mm (0.0433)	38.3g (1.351oz)

PART	MATERIAL	FINISH
Top Plunger	Hardened Steel	Gold Plated
Bottom Plunger	Hardened Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Stainless Steel	Gold Plated

BOTTOM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



**EMULATION TECHNOLOGY, INC.**

— VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD  
CAMARILLO, CA 93012

TEL: (805) 383-8480  
FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/09/06	REVISION: C	<b>ASSEMBLY DRAWING</b>
CHECKED: Perry Munroe	PREPARED BY: Huy Nguyen	ITEM: POGO-PIN-8.69-2	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.69-2