


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/4/06	K.B.

SKT2817

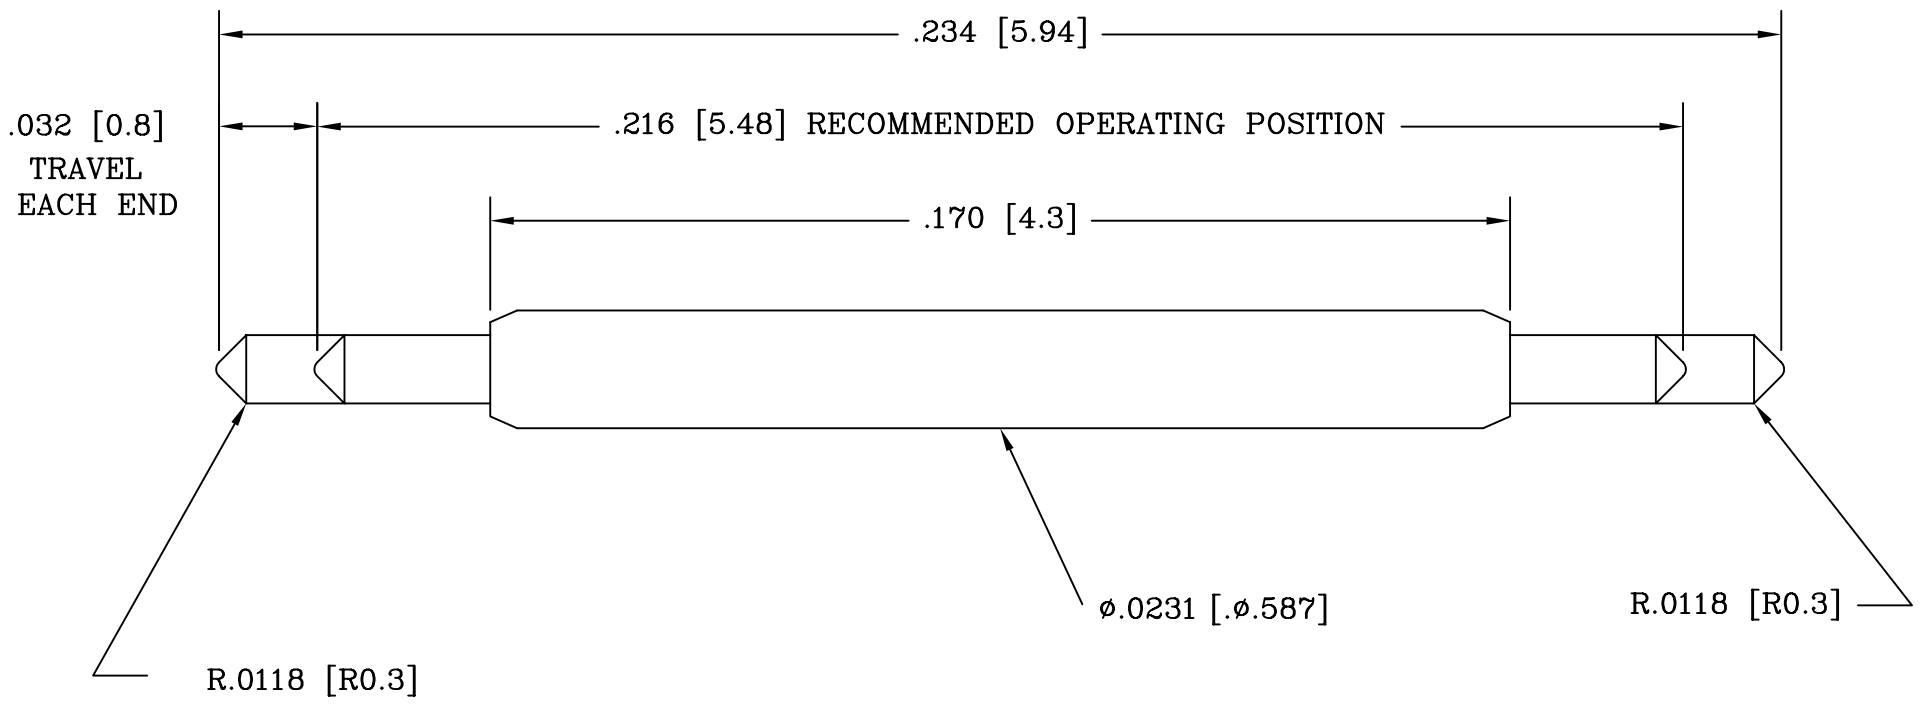


TECHNICAL DATA

SPRING FORCE: 40g (1.4oz) AT REC. OPERATING POSITION
 OPERATING TEMP.: -40C TO +120C
 CURRENT RATING: 2 AMPS
 AVERAGE RESISTANCE: 63mOhms.
 INDUCTANCE: 1.35 nH

MATERIAL & FINISH:

PLUNGER: HARDENED STEEL / GOLD PLATED
 BARREL: COPPER ALLOY / GOLD PLATED
 SPRING: MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051
 TEL:(408)982-0660 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 11/16/06	REVISION: A	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Keith Burns	ITEM: POGO-PIN-5.94-2	
Scale N/A	DO NOT SCALE DRAWING	DESCRIPTION: POGO-PIN-5.94-2	