


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/16/07	H.N.
B	CHG BARREL MATERIAL, ADDED TOL	12/17/14	JAG

SKT2849

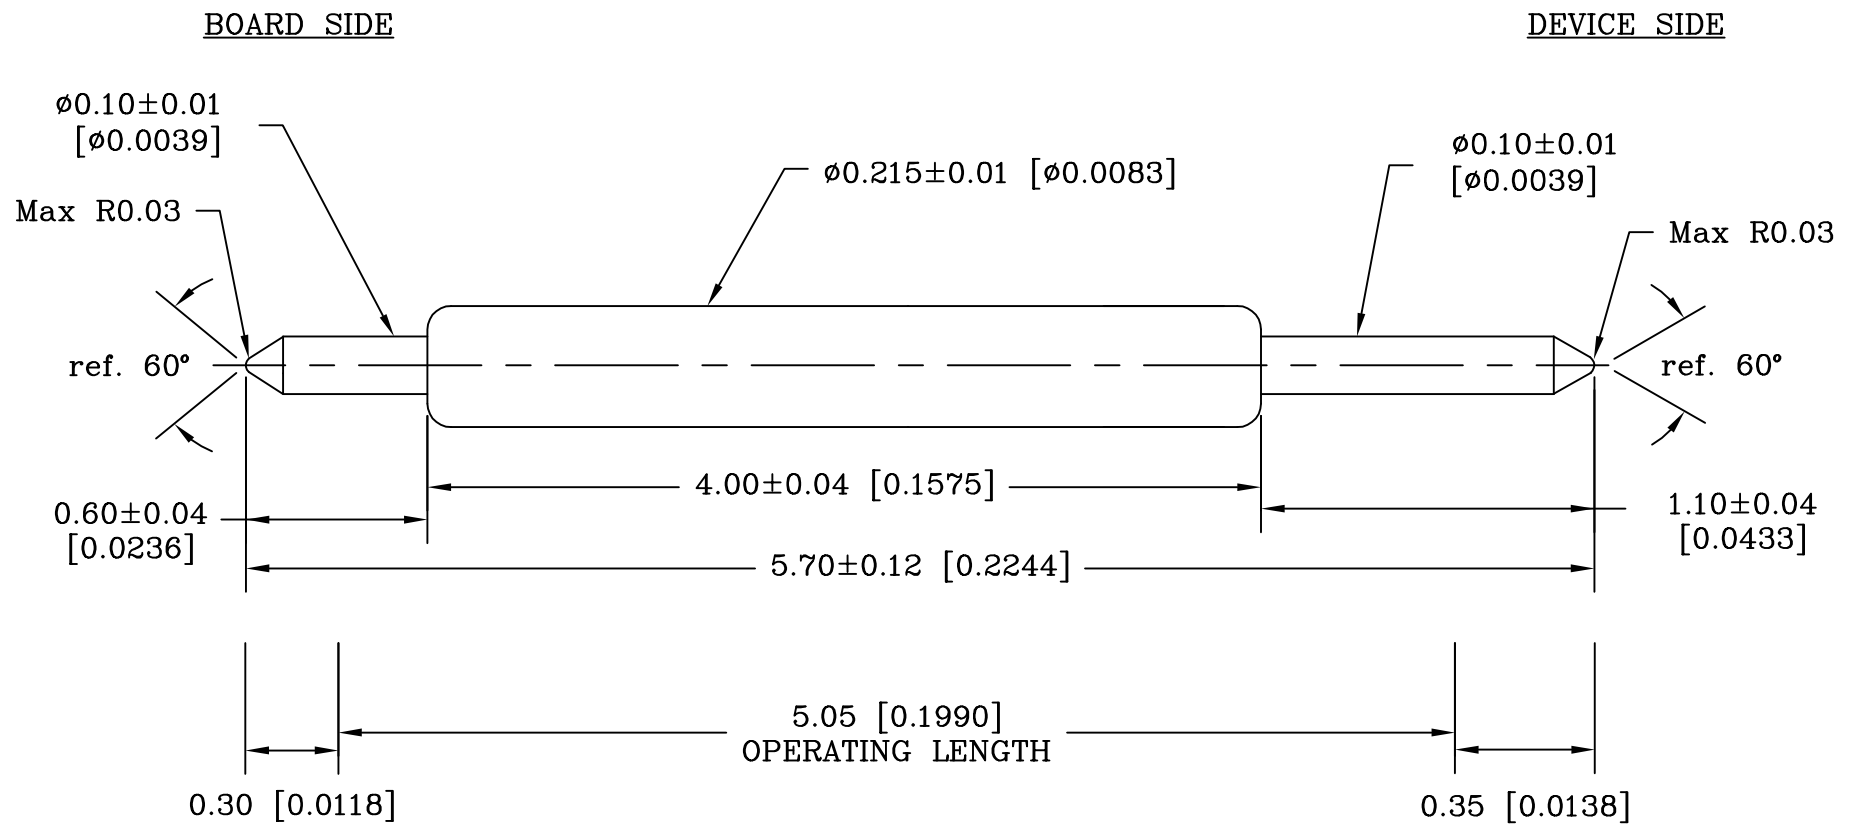

POINTING ACCURACY: ±0.04mm


SPRING FORCE [±20%]

4.0g(0.141oz) AT INITIAL TRAVEL,
 10.8g(0.381oz) AT 0.65mm(0.0256) RECOMMENDED TRAVEL
 14.4g(0.508oz) AT 1.00mm(0.0394) FULL TRAVEL

MATERIAL & FINISH:

PLUNGER (Device Side)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER (Board Side)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	Ni-Au ALLOY	/GOLD PLATED
SPRING	MUSIC WIRE	/GOLD PLATED

UNIT: MILLIMETER [INCH]

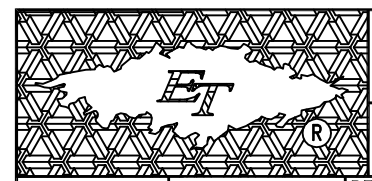

Emulation Technology, Inc.
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL:(805)383-8480
 FAX:(805)383-8484

SHEET: 1 OF 1	DATE: 01/16/07	REVISION: B	ASSEMBLY DRAWING
CHECKED:	DRAWN: H.N.	ITEM: POGO-PIN-5.70-5	
Scale N/A	DO NOT SCALE DRAWING	DESCRIPTION: POGO-PIN-5.70-5	