


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/14/10	JAG

SKT3567

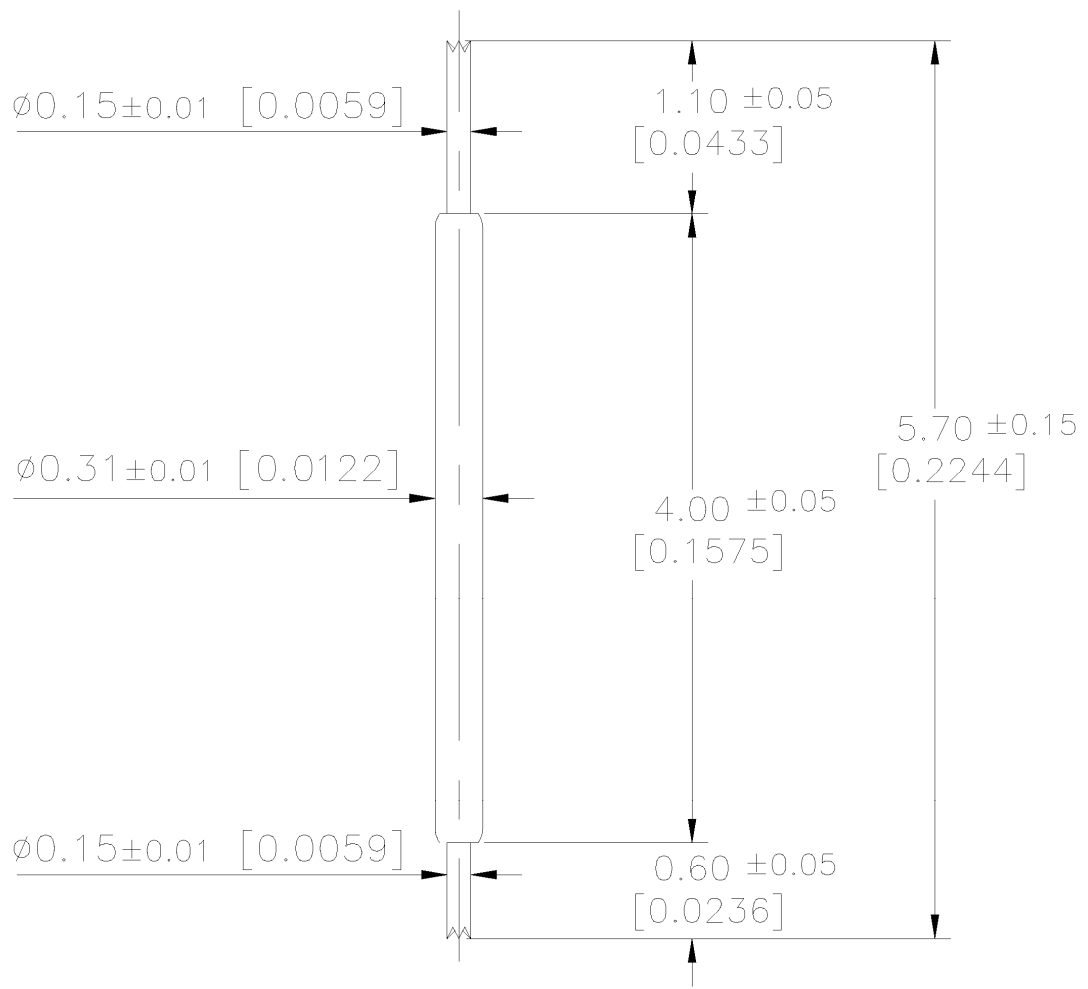

Pointing Accuracy: ± 0.03 mm

Spring Force


- 11.3g (0.399oz) at initial travel
- 20.3g (0.716oz) at 0.50mm (0.0197) recommended travel
- 25.7g (0.907oz) at .80mm (0.0315) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
 X.X ± 0.100 MM ANGULAR: X.X° $\pm 1.0^\circ$
 X.XX ± 0.050 MM X.XX° $\pm 0.5^\circ$
 X.XXX ± 0.025 MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

		EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 12/14/10	REVISION: A	ASSEMBLY DRAWING ITEM: POGO-PIN-5.70-9
CHECKED:		PREPARED BY: J. GELACIO	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.70-9