


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/29/14	JAG

SKT4120

DEVICE SIDE

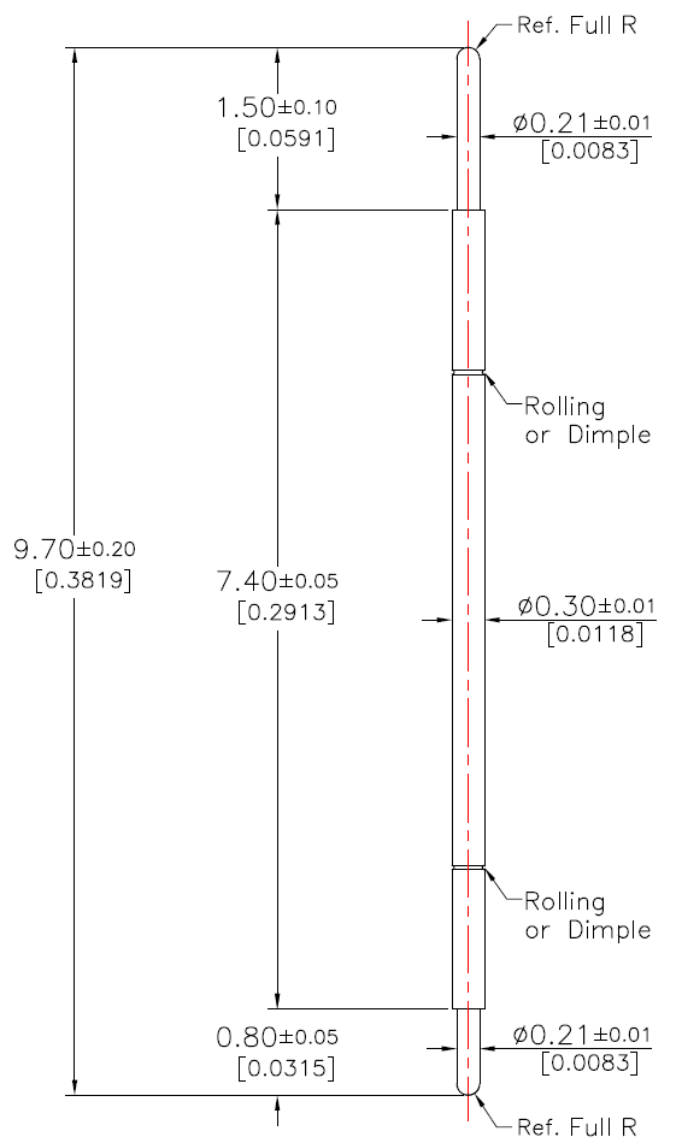

BOARD SIDE

Pointing Accuracy: ± 0.05 mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	3.3g (0.116oz)
Recommended Travel	0.80mm (0.0315)	6.4g (0.228oz)
Full Travel	1.30mm (0.0512)	8.4g (0.296oz)

PART	MATERIAL	FINISH
Plunger (Device Side)	Hardened Steel	Gold Plated
Plunger (Board Side)	Hardened Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Music Wire	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 ——— VLSI and SMT ADAPTERS and ACCESSORIES ———

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 12/29/14	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: J. GELACIO	ITEM: POGO-PIN-9.70-5	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-9.70-5