


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	1/15/16	NEN

SKT4230

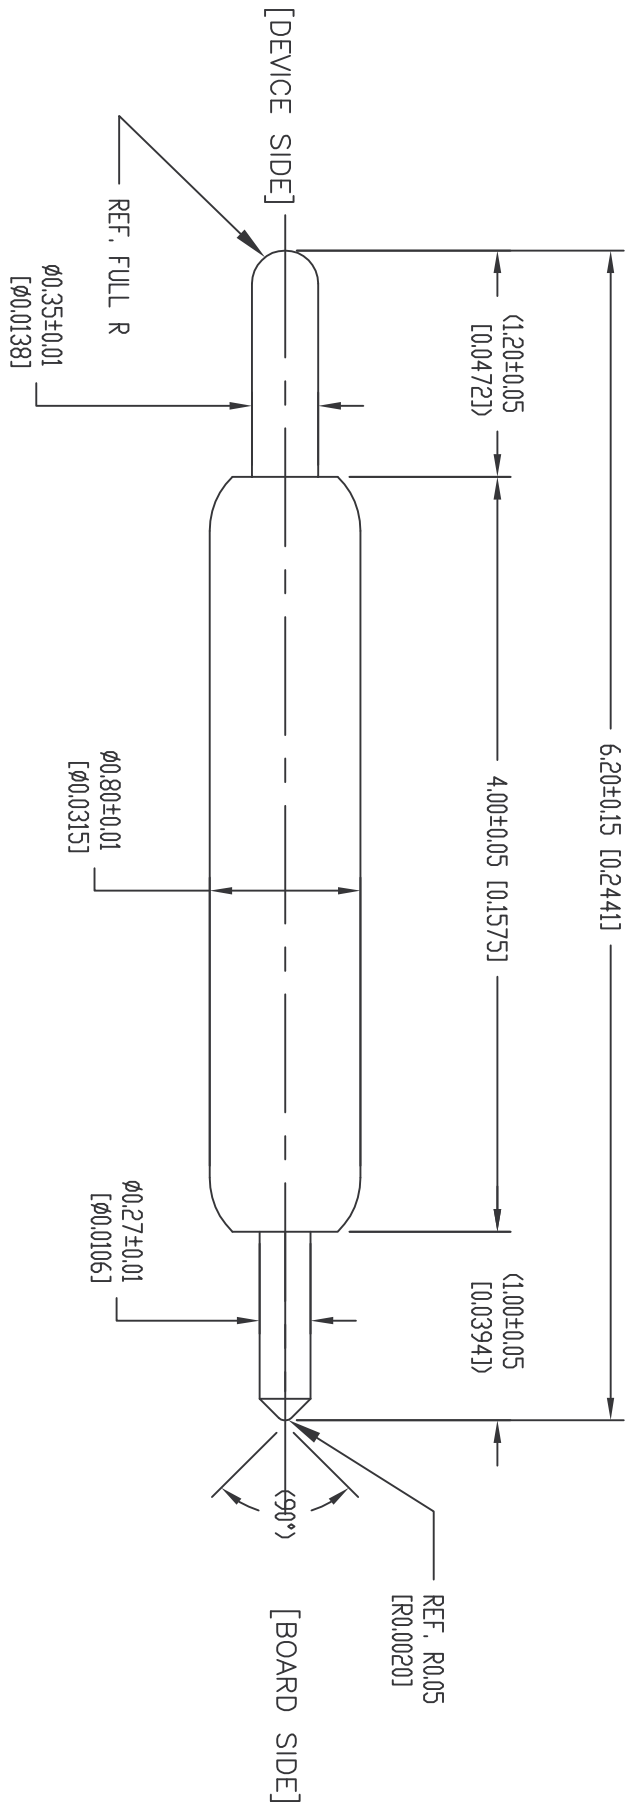

NOTE: 1.50MM PITCH.

Unit: Millimeter [inch]

POINTING ACCURACY: $\pm 0.06\text{mm}$

SPRING FORCE $[\pm 20\%]$


3.8g (0.134oz) at INITIAL TRAVEL

19.0g (0.670oz) at 0.80mm (0.0315") RECOMMENDED TRAVEL

23.7g (0.937oz) at 1.05mm (0.0413") FULL TRAVEL

To reduce the risk of SHORTING or abnormal mechanical operation, this Pointing Accuracy needs to be highly considered during housing designn.

PART	MATERIAL	FINISH
PLUNGER [DEVICE SIDE]	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER [BOARD SIDE]	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	MUSIC WIRE	/GOLD PLATED

		EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES	
		741 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1 CHECKED:	DATE: 1/15/16 DRAWN: N. NASHED	REVISION: A	ITEM: ASSEMBLY DRAWING DESCRIPTION: POGO-PIN-6.20-1

DO NOT SCALE DRAWING