


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/11/11	JAG

SKT3628

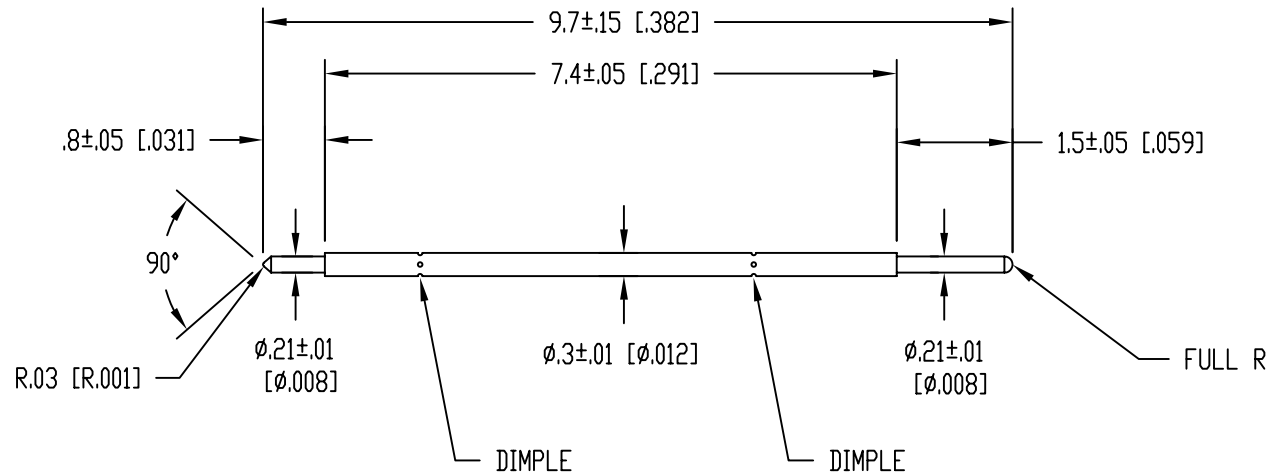

PART	MATERIAL	FINISH
SPRING	MUSIC WIRE	GOLD PLATED
BARREL	PHOSPHOR BRONZE	GOLD PLATED
TOP PLUNGER	PD ALLOY	NOT PLATED
BOTTOM PLUNGER	HARDENED STEEL	GOLD PLATED

- NOTES:
 1. SPRING FORCE: ±20%
 2. POINTING ACCURACY: ±.05mm

STATE	TRAVEL (mm)	SPRING FORCE (g)
INITIAL TRAVEL	--	1.0
RECOMMENDED TRAVEL	0.80	6.0
FULL TRAVEL	1.30	9.9

SCALE 10:1

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ARE:
 DECIMALS: .XX ±0.100MM .XX ±1.0°
 .XX ±0.050MM .XX ±0.5°
 X.XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 04/11/11	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-9.70-3	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-9.70-3